

# START Series

## DOWNLIGHT / Adjustable




# SRA68/TRA68

## Downlight



### Drawing

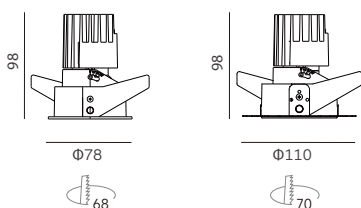

### 7.5 W 600lm-650lm CITIZEN

| Code              | Size     | System LM | LED Voltage | LED W | System W | CRI | CCT   | Beam |
|-------------------|----------|-----------|-------------|-------|----------|-----|-------|------|
| SRA68-CA930L20S-X | Ø78*98mm | 600 lm    | 31 V        | 7.5W  | 9 W      | 90  | 3000K | 24°  |
| SRA68-CA940L20S-X | Ø78*98mm | 650 lm    | 31 V        | 7.5W  | 9 W      | 90  | 4000K | 24°  |
| SRA68-CA930L40S-X | Ø78*98mm | 600 lm    | 31 V        | 7.5W  | 9 W      | 90  | 3000K | 40°  |
| SRA68-CA940L40S-X | Ø78*98mm | 650 lm    | 31 V        | 7.5W  | 9 W      | 90  | 4000K | 40°  |
| SRA68-CA930R55S-X | Ø78*98mm | 500 lm    | 31 V        | 7.5W  | 9 W      | 90  | 3000K | 55°  |
| SRA68-CA940R55S-X | Ø78*98mm | 550 lm    | 31 V        | 7.5W  | 9 W      | 90  | 4000K | 55°  |

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

### 11 W 800lm-850lm CITIZEN

| Code              | Size     | System LM | LED Voltage | LED W | System W | CRI | CCT   | Beam |
|-------------------|----------|-----------|-------------|-------|----------|-----|-------|------|
| SRA68-CB930L20S-X | Ø78*98mm | 800 lm    | 31 V        | 11 W  | 13 W     | 90  | 3000K | 24°  |
| SRA68-CB940L20S-X | Ø78*98mm | 850 lm    | 31 V        | 11 W  | 13 W     | 90  | 4000K | 24°  |
| SRA68-CB930L40S-X | Ø78*98mm | 800 lm    | 31 V        | 11 W  | 13 W     | 90  | 3000K | 40°  |
| SRA68-CB940L40S-X | Ø78*98mm | 850 lm    | 31 V        | 11 W  | 13 W     | 90  | 4000K | 40°  |
| SRA68-CB930R55S-X | Ø78*98mm | 650 lm    | 31 V        | 11 W  | 13 W     | 90  | 3000K | 55°  |
| SRA68-CB940R55S-X | Ø78*98mm | 700 lm    | 31 V        | 11 W  | 13 W     | 90  | 4000K | 55°  |

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

### 8.5 W 480lm-500lm CITIZEN

| Code              | Size     | System LM | LED Voltage | LED W | System W | CRI | CCT   | Beam |
|-------------------|----------|-----------|-------------|-------|----------|-----|-------|------|
| SRA68-EA930L10S-X | Ø78*98mm | 480 lm    | 12V         | 8.5 W | 10W      | 90  | 3000K | 10°  |
| SRA68-EA940L10S-X | Ø78*98mm | 500 lm    | 12V         | 8.5 W | 10W      | 90  | 4000K | 10°  |

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)