



**START Series**  
**DOWNLIGHT** / Adjustable

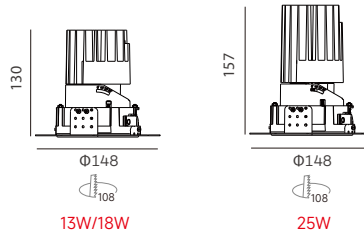

# TRA100

## Downlight



**13W 1100Lm-1300Lm**

**CITIZEN**

Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
TRA100-CB930L20S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	20°
TRA100-CB940L20S-X	Φ110*130mm	1200 lm	36 V	13 W	15 W	90	4000K	20°
TRA100-CB930L30S-X	Φ110*130mm	1200 lm	36 V	13 W	15 W	90	3000K	30°
TRA100-CB940L30S-X	Φ110*130mm	1300 lm	36 V	13 W	15 W	90	4000K	30°
TRA100-CB930L40S-X	Φ110*130mm	1200 lm	36 V	13 W	15 W	90	3000K	40°
TRA100-CB940L40S-X	Φ110*130mm	1300 lm	36V	13 W	15 W	90	4000K	40°
TRA100-CB930L45S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	45°
TRA100-CB940L45S-X	Φ110*130mm	1200 lm	36 V	13 W	15 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

**18W 1600Lm-1800Lm**

**CITIZEN**

Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
TRA100-CC930L20S-X	Φ110*130mm	1600 lm	36 V	18 W	21 W	90	3000K	20°
TRA100-CC940L20S-X	Φ110*130mm	1700 lm	36 V	18 W	21 W	90	4000K	20°
TRA100-CC930L30S-X	Φ110*130mm	1700 lm	36 V	18 W	21 W	90	3000K	30°
TRA100-CC940L30S-X	Φ110*130mm	1800 lm	36 V	18 W	21 W	90	4000K	30°
TRA100-CC930L40S-X	Φ110*130mm	1700 lm	36 V	18 W	21 W	90	3000K	40°
TRA100-CC940L40S-X	Φ110*130mm	1800 lm	36 V	18 W	21 W	90	4000K	40°
TRA100-CC930L45S-X	Φ110*130mm	1600 lm	36 V	18 W	21 W	90	3000K	45°
TRA100-CC940L45S-X	Φ110*130mm	1700 lm	36 V	18 W	21 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

**7W 500Lm-550Lm**

**CREE**

Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
TRA100-CA930L10S-X	Φ110*130mm	500 lm	36 V	7 W	9 W	90	3000K	10°
TRA100-CA940L10S-X	Φ110*130mm	550 lm	36 V	7 W	9 W	90	4000K	10°

**25W 2100Lm-2300Lm**

**CITIZEN**

Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
TRA100-CD930L20S-X	Φ110*157mm	2100 lm	36V	25W	28W	90	3000K	20°
TRA100-CD940L20S-X	Φ110*157mm	2200 lm	36V	25W	28W	90	4000K	20°
TRA100-CD930L36S-X	Φ110*157mm	2200 lm	36V	25W	28W	90	3000K	36°
TRA100-CD940L36S-X	Φ110*157mm	2300 lm	36V	25W	28W	90	4000K	36°
TRA100-CD930L50S-X	Φ110*157mm	2200 lm	36V	25W	28W	90	3000K	50°
TRA100-CD940L50S-X	Φ110*157mm	2300 lm	36V	25W	28W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)