

VTRIM / MODULE DOWNLIGHT




VRA4

OPTIONAL:



Drawing

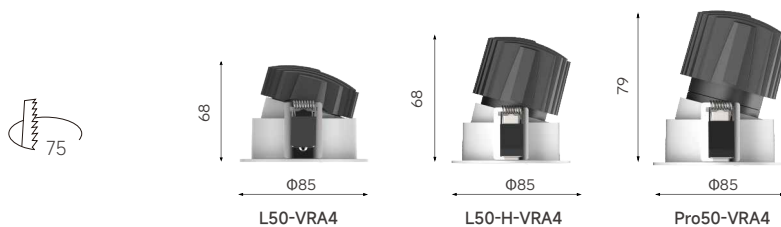

Downlight VRA4




Features

- Higher efficiency.
- Compact height design.
- Ultra bright in light.
- Extremely small in size.
- Smart heatsink design with airflow and body radiation.

Specifications

- Dimming modes: ON-OFF, PhaseDIM, 1-10V, Dali
- Beam angle: 15°, 25°, 35°, 60°
- Physical: Die-casting, powder coating
- Accessories: linear spread lens, frosted glass, honeycomb louver


Type



Mountings



Light distribution



VTRIM / L50 DOWNLIGHT




L50 DOWNLIGHT MODULE



Black

Drawing



Order Options

7.5W 700lm-750lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|-----------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|------|
| L50-7.5W-930-15 | Ø50*44mm | 700 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 3000K | 15° |
| L50-7.5W-940-15 | Ø50*44mm | 750 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 4000K | 15° |
| L50-7.5W-930-25 | Ø50*44mm | 700 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 3000K | 25° |
| L50-7.5W-940-25 | Ø50*44mm | 750 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 4000K | 25° |
| L50-7.5W-930-35 | Ø50*44mm | 700 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 3000K | 35° |
| L50-7.5W-940-35 | Ø50*44mm | 750 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 4000K | 35° |
| L50-7.5W-930-60 | Ø50*44mm | 700 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 3000K | 60° |
| L50-7.5W-940-60 | Ø50*44mm | 750 lm | 31 V | 250 mA | 7.5W | 9W | 90 | 4000K | 60° |

11W 950lm-1000lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|----------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|------|
| L50-11W-930-15 | Ø50*44mm | 950 lm | 31 V | 350 mA | 11W | 13W | 90 | 3000K | 15° |
| L50-11W-940-15 | Ø50*44mm | 1000 lm | 31 V | 350 mA | 11W | 13W | 90 | 4000K | 15° |
| L50-11W-930-25 | Ø50*44mm | 950 lm | 31 V | 350 mA | 11W | 13W | 90 | 3000K | 25° |
| L50-11W-940-25 | Ø50*44mm | 1000 lm | 31 V | 350 mA | 11W | 13W | 90 | 4000K | 25° |
| L50-11W-930-35 | Ø50*44mm | 950 lm | 31 V | 350 mA | 11W | 13W | 90 | 3000K | 35° |
| L50-11W-940-35 | Ø50*44mm | 1000 lm | 31 V | 350 mA | 11W | 13W | 90 | 4000K | 35° |
| L50-11W-930-60 | Ø50*44mm | 950 lm | 31 V | 350 mA | 11W | 13W | 90 | 3000K | 60° |
| L50-11W-940-60 | Ø50*44mm | 1000 lm | 31 V | 350 mA | 11W | 13W | 90 | 4000K | 60° |


VTRIM / L50H
DOWNLIGHT



L50H
DOWNLIGHT
MODULE

●
Black

Drawing



Order Options

9W 850lm-950lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|----------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|------|
| L50H-9W-930-20 | Φ50*65mm | 850 lm | 36 V | 250 mA | 9W | 11W | 90 | 3000K | 20° |
| L50H-9W-930-20 | Φ50*65mm | 900 lm | 36 V | 250 mA | 9W | 11W | 90 | 4000K | 20° |
| L50H-9W-930-35 | Φ50*65mm | 900 lm | 36 V | 250 mA | 9W | 11W | 90 | 3000K | 35° |
| L50H-9W-940-35 | Φ50*65mm | 950 lm | 36 V | 250 mA | 9W | 11W | 90 | 4000K | 35° |
| L50H-9W-930-60 | Φ50*65mm | 850 lm | 36 V | 250 mA | 9W | 11W | 90 | 3000K | 60° |
| L50H-9W-940-60 | Φ50*65mm | 900 lm | 36 V | 250 mA | 9W | 11W | 90 | 4000K | 60° |

13W 1200lm-1300lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|-----------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|------|
| L50H-13W-930-20 | Φ50*65mm | 1200 lm | 36 V | 350 mA | 9W | 15W | 90 | 3000K | 20° |
| L50H-13W-940-20 | Φ50*65mm | 1300 lm | 36 V | 350 mA | 9W | 15W | 90 | 4000K | 20° |
| L50H-13W-930-35 | Φ50*65mm | 1200 lm | 36 V | 350 mA | 9W | 15W | 90 | 3000K | 35° |
| L50H-13W-940-35 | Φ50*65mm | 1300 lm | 36 V | 350 mA | 9W | 15W | 90 | 4000K | 35° |
| L50H-13W-930-60 | Φ50*65mm | 1200 lm | 36 V | 350 mA | 9W | 15W | 90 | 3000K | 60° |
| L50H-13W-940-60 | Φ50*65mm | 1300 lm | 36 V | 350 mA | 9W | 15W | 90 | 4000K | 60° |

VTRIM / PRO50 DOWNLIGHT




PRO50 DOWNLIGHT MODULE



Black

Drawing



Order Options

7W 500lm-650lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|--------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|------|
| Pro50-7W-927 | Φ50*76mm | 500 lm | 36 V | 200 mA | 7W | 9W | 97 | 2700K | 10° |
| Pro50-7W-930 | Φ50*76mm | 550 lm | 36 V | 200 mA | 7W | 9W | 97 | 3000K | 10° |
| Pro50-7W-935 | Φ50*76mm | 600 lm | 36 V | 200 mA | 7W | 9W | 97 | 3500K | 10° |
| Pro50-7W-940 | Φ50*76mm | 650 lm | 36 V | 200 mA | 7W | 9W | 97 | 4000K | 10° |

13W 1050lm-1200lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|---------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|-------------|
| Pro50-13W-927 | Φ50*76mm | 1050 lm | 36 V | 350 mA | 13W | 15W | 97 | 2700K | 15°/25°/35° |
| Pro50-13W-930 | Φ50*76mm | 1100 lm | 36 V | 350 mA | 13W | 15W | 97 | 3000K | 15°/25°/35° |
| Pro50-13W-935 | Φ50*76mm | 1150 lm | 36 V | 350 mA | 13W | 15W | 97 | 3500K | 15°/25°/35° |
| Pro50-13W-940 | Φ50*76mm | 1200 lm | 36 V | 350 mA | 13W | 15W | 97 | 4000K | 15°/25°/35° |
| Pro50-13W-927 | Φ50*76mm | 1000 lm | 36 V | 350 mA | 13W | 15W | 97 | 2700K | 50° |
| Pro50-13W-930 | Φ50*76mm | 1050 lm | 36 V | 350 mA | 13W | 15W | 97 | 3000K | 50° |
| Pro50-13W-935 | Φ50*76mm | 1100 lm | 36 V | 350 mA | 13W | 15W | 97 | 3500K | 50° |
| Pro50-13W-940 | Φ50*76mm | 1150 lm | 36 V | 350 mA | 13W | 15W | 97 | 4000K | 50° |

18W 1400lm-1700lm

| Code | Size | System LM | LED Voltage | LED Current | LED W | System W | CRI | CCT | Beam |
|---------------|----------|-----------|-------------|-------------|-------|----------|-----|-------|-------------|
| Pro50-18W-927 | Φ50*76mm | 1500 lm | 36 V | 500 mA | 18W | 21W | 97 | 2700K | 15°/25°/35° |
| Pro50-18W-930 | Φ50*76mm | 1600 lm | 36 V | 500 mA | 18W | 21W | 97 | 3000K | 15°/25°/35° |
| Pro50-18W-935 | Φ50*76mm | 1650 lm | 36 V | 500 mA | 18W | 21W | 97 | 3500K | 15°/25°/35° |
| Pro50-18W-940 | Φ50*76mm | 1700 lm | 36 V | 500 mA | 18W | 21W | 97 | 4000K | 15°/25°/35° |
| Pro50-18W-927 | Φ50*76mm | 1400 lm | 36 V | 500 mA | 18W | 21W | 97 | 2700K | 50° |
| Pro50-18W-930 | Φ50*76mm | 1500 lm | 36 V | 500 mA | 18W | 21W | 97 | 3000K | 50° |
| Pro50-18W-935 | Φ50*76mm | 1600 lm | 36 V | 500 mA | 18W | 21W | 97 | 3500K | 50° |
| Pro50-18W-940 | Φ50*76mm | 1650 lm | 36 V | 500 mA | 18W | 21W | 97 | 4000K | 50° |