


DORI/DORI Maxi

Recessed Ground Light

IP 67 [5m] | 800 Kg | Input 12-24VDC | Top cover Stainless Steel 316 | CE



DORI Maxi V2

Quickinfo

GENERAL

underground
IP 67

LED

CITIZEN LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 20°, 30°, 50°

PHYSICAL

top cover: stainless steel 316
body: anodized aluminium

Features



Body: Anodized Aluminium
Glass: tempered glass

Function

A perfect marker light for in-ground or outdoor application.

IP 67 design with integral thermal management for long life.

High precision machining ensures perfect mechanical fit for long life.

8 mm Tempered glass lens support 800 kg "driver over" performance,

High reliability, maintenance free.

Light emission: one emission, two opposite emissions.

Very low surface temperature lens can

Very low surface temperature lens can

be touched without injury

Suitable for indoor applications in


bathroom, kitchens, bars when lens may

be touched without injury.

Light distribution for 3000K



10W 850 lm-900 lm

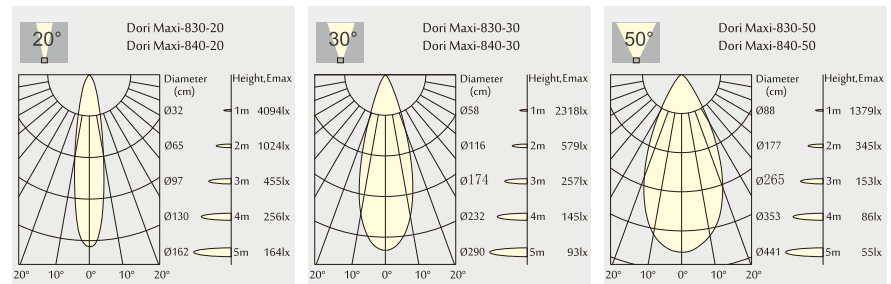

Order Information

Dori Maxi 850-900Lm MODELS (With CITIZEN LED, DC-DC Driver)

Code	Module output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
Dori Maxi-830-20	850 lm	24 V	9W	10 W	83	3000K	20°
Dori Maxi-840-20	900 lm	24 V	9W	10 W	83	4000K	20°
Dori Maxi-830-30	850 lm	24 V	9W	10 W	83	3000K	30°
Dori Maxi-840-30	900 lm	24 V	9W	10 W	83	4000K	30°
Dori Maxi-830-50	850 lm	24 V	9W	10 W	83	3000K	50°
Dori Maxi-840-50	900 lm	24 V	9W	10 W	83	4000K	50°