


DORI/DORI Micro

Recessed Ground Light

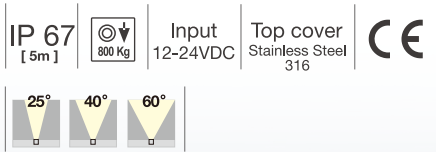

Quickinfo

GENERAL

underground _____
IP 67 _____

LED

OSRAM LED module _____
2700K, 3000K, 4000K _____
CRI > 80, CRI > 90 _____
Bining < 3-Step MacAdam _____

ESTIMATED LED LIFETIME

L80 / 50,000h _____

OPTICAL

direct illumination _____
beam angle 25, 40°, 60° _____

PHYSICAL

top cover: stainless steel 316 _____
body: anodized aluminium _____

Features



Body: Anodized Aluminium
Glass: tempered glass

Function


A perfect marker light for in-ground or outdoor application.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Light emission: one emission, two opposite emissions.
Very low surface temperature lens can be

Very low surface temperature lens can be touched without injury
Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K



1.5W 100 lm-110 lm

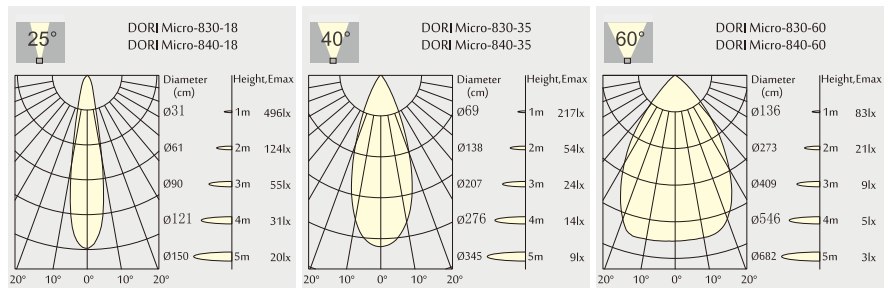

Order Information

DORI Micro 100-110 Lm MODELS (With OSRAM LED, DC-DC Driver)

| Code | Lumen output | Input Voltage | LED Power | System Power | CRI | CCT | BEAM |
|-------------------|--------------|---------------|-----------|--------------|-----|-------|------|
| DORI Micro-830-25 | 100 lm | 12-24 V | 1W | 1.5W | 83 | 3000K | 25° |
| DORI Micro-840-25 | 110 lm | 12-24 V | 1W | 1.5W | 83 | 4000K | 25° |
| DORI Micro-830-40 | 100 lm | 12-24 V | 1W | 1.5W | 83 | 3000K | 40° |
| DORI Micro-840-40 | 110 lm | 12-24 V | 1W | 1.5W | 83 | 4000K | 40° |
| DORI Micro-830-60 | 100 lm | 12-24 V | 1W | 1.5W | 83 | 3000K | 60° |
| DORI Micro-840-60 | 110 lm | 12-24 V | 1W | 1.5W | 83 | 4000K | 60° |