


DORI/DORI Nano

Recessed Ground Light

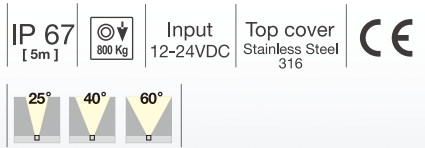

Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 25°, 40°, 60°

PHYSICAL

top cover: stainless steel 316
body: anodized aluminium

Features



Body: Anodized Aluminium
Glass: tempered glass

Function


A perfect marker light for in-ground or outdoor application.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Light emission: one emission, two opposite emissions.
Very low surface temperature lens can

Very low surface temperature lens can be touched without injury
Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K



3W 150 lm-160 lm

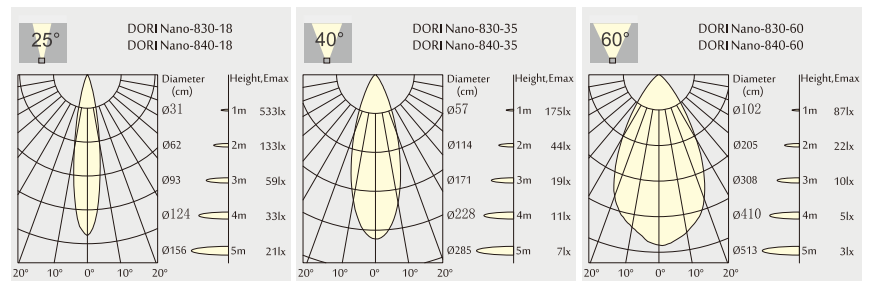

Order Information

DORI Nano 150-160 Lm MODELS (With OSRAM LED, DC-DC Driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
DORI Nano-830-25	150 lm	12-24 V	1.6W	3W	83	3000K	25°
DORI Nano-840-25	160 lm	12-24 V	1.6W	3W	83	4000K	25°
DORI Nano-830-40	150 lm	12-24 V	1.6W	3W	83	3000K	40°
DORI Nano-840-40	160 lm	12-24 V	1.6W	3W	83	4000K	40°
DORI Nano-830-60	150 lm	12-24 V	1.6W	3W	83	3000K	60°
DORI Nano-840-60	160 lm	12-24 V	1.6W	3W	83	4000K	60°