


EOS / EOS Mini Projector Light

IP 67 [5m]	Power 4.8W	Input 12-24VDC	Material Aluminium	CE
---------------	---------------	-------------------	-----------------------	----



Aluminium COLOUR



Metal Black COLOUR

Quickinfo

GENERAL

projector
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 15°, 40°, 60°

PHYSICAL

housing: anodized aluminium

Features



Body: Anodized Aluminium
Glass: tempered glass

Function

Creating striking wall effect with focus beam
IP67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
Stainless steel (316) front face ensures corrosion free outdoor performance in salty damp environment.
Optional stake mounting offers easy installation and tool free repositioning.


Metal black COLOUR with triple layer coating for high resistance to corrosion:

chemical conversion coating on the aluminium surface followed by a first layer of anodising, a second layer of epoxy powder and a third finishing layer of polyester powder.

Corrosion tests in artificial atmospheres salt spray test passed at 1000hrs

Light distribution for 3000K

EOS Mini 4.3W 380lm-420lm

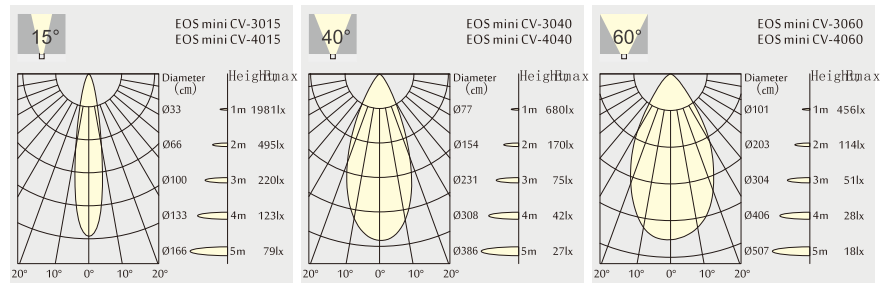

Order Information

EOS mini 3 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EOS mini CV-3015	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	15°
EOS mini CV-4015	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	15°
EOS mini CV-3040	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	40°
EOS mini CV-4040	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	40°
EOS mini CV-3060	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	60°
EOS mini CV-4060	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	60°