

EOS / EOS Mini S316

Stainless Steel 316 Version

IP 67 [5m]	Power 4.8W	Input 12-24VDC	Material Stainless Steel 316	CE
---------------	---------------	-------------------	------------------------------------	----

15°	40°	60°
-----	-----	-----



OSRAM

Quickinfo

GENERAL

projector
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h


OPTICAL

direct illumination
beam angle 15°, 40°, 60°

PHYSICAL

housing: stainless steel 316

Features

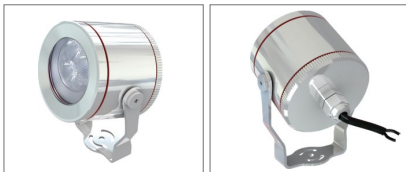

Body: Stainless steel 316


Function

Creating striking wall effect with focus beam
IP67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
The whole fixture is made of stainless

The whole fixture is made of stainless steel(316),ensures corrosionfree outdoor performance in salty,damp enviorment,especially suitable for outdoor lighting.
Optional stake mounting offers easy installation and tool free repositioning.

Light distribution for 3000K

EOS Mini S316 4.3W 380lm-420lm

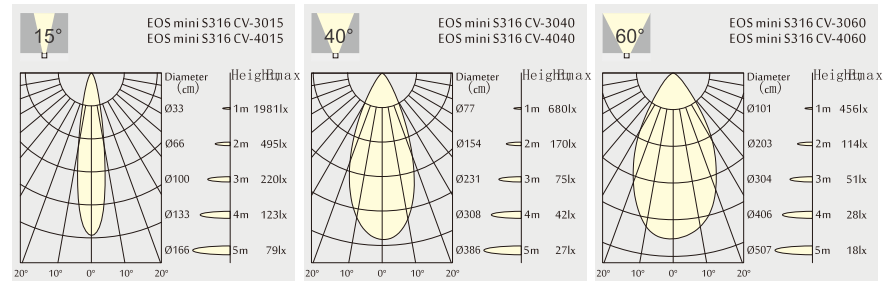

Order Information

EOS mini S316 3 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EOS mini S316 CV-3015	380 lm	12-24 V	4,3 W	4,8 W	83	3000K	15°
EOS mini S316 CV-4015	420 lm	12-24 V	4,3 W	4,8 W	83	4000K	15°
EOS mini S316 CV-3040	380 lm	12-24 V	4,3 W	4,8 W	83	3000K	40°
EOS mini S316 CV-4040	420 lm	12-24 V	4,3 W	4,8 W	83	4000K	40°
EOS mini S316 CV-3060	380 lm	12-24 V	4,3 W	4,8 W	83	3000K	60°
EOS mini S316 CV-4060	420 lm	12-24 V	4,3 W	4,8 W	83	4000K	60°

EOS Mini CV Outdoor Projector Light
Non-Dimmable
Lumen output: 380-420lm



Efficiency: 79 lm/W
Life time: 50,000 hours (70% Lumen maintenance)
3 Years Guarantee