


EOS / EOS Maxi Projector Light

IP 67 [5m]	Power 11.5W	Input 20-24VDC	Material Aluminium	CE
---------------	----------------	-------------------	-----------------------	----



Aluminium COLOUR



Metal Black COLOUR

Quickinfo

GENERAL

projector
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 20°, 30°, 60°

PHYSICAL

housing: anodized aluminium

Features



Body: Anodized Aluminium
Glass: tempered glass


Function

High power projector for architectural grade accent lighting effect.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
Stainless steel (316) front face ensures corrosion free outdoor performance in salty damp environment.
Optional stake mounting offers easy installation and tool free repositioning.

Metal black COLOUR with triple layer coating for high resistance to corrosion: chemical conversion coating on the aluminium surface followed by a first layer of anodising, a second layer of epoxy powder and a third finishing layer of polyester powder. Corrosion tests in artificial atmospheres salt spray test passed at 1000hrs

Light distribution for 3000K

EOS Maxi 11W 1000lm-1100lm

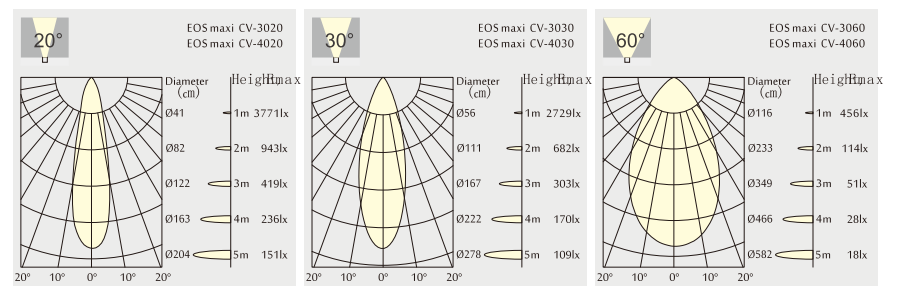

Order Information

EOS maxi 7 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EOS maxi CV-3020	1000 lm	24 V	11 W	11.5 W	83	3000K	20°
EOS maxi CV-4020	1100 lm	24 V	11 W	11.5 W	83	4000K	20°
EOS maxi CV-3030	1000 lm	24 V	11 W	11.5 W	83	3000K	30°
EOS maxi CV-4030	1100 lm	24 V	11 W	11.5 W	83	4000K	30°
EOS maxi CV-3060	1000 lm	24 V	11 W	11.5 W	83	3000K	60°
EOS maxi CV-4060	1100 lm	24 V	11 W	11.5 W	83	4000K	60°