


EPO / EPO Maxi S316

Stainless Steel 316 Version

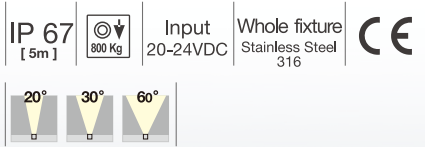

Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 20°, 30°, 60°

PHYSICAL

top cover: stainless steel 316
body: stainless steel 316

Function


High power ground light with great accent lighting effect.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
The whole fixture is made of stainless steel(316), ensures corrosion free outdoor performance in salty, damp environment

Very low surface temperature lens can be touched without injury suitable for indoor

8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Very low surface temperature lens can be touched without injury suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K

EPO Maxi S316 11W 1000lm-1100lm

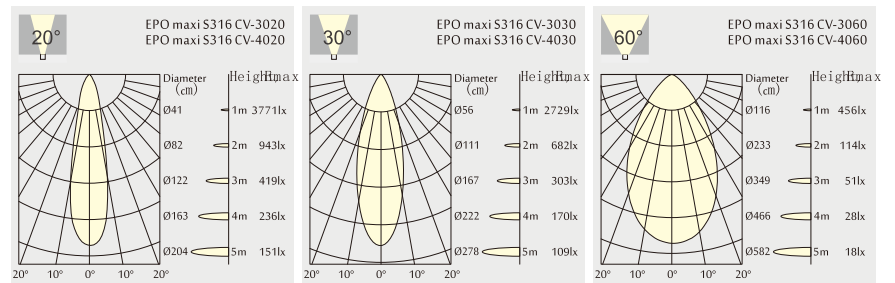

Features



Cover: stainless steel 316
Body: stainless steel 316
Glass: tempered glass

Order Information

EPO maxi S316 7 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EPO maxi S316 CV-3020	1000 lm	24 V	11 W	11.5 W	83	3000K	20°
EPO maxi S316 CV-4020	1100 lm	24 V	11 W	11.5 W	83	4000K	20°
EPO maxi S316 CV-3030	1000 lm	24 V	11 W	11.5 W	83	3000K	30°
EPO maxi S316 CV-4030	1100 lm	24 V	11 W	11.5 W	83	4000K	30°
EPO maxi S316 CV-3060	1000 lm	24 V	11 W	11.5 W	83	3000K	60°
EPO maxi S316 CV-4060	1100 lm	24 V	11 W	11.5 W	83	4000K	60°

EPO Maxi CV Ground Light Series
External 24VDC LED driver is required
Non-Dimmable
Lumen output: 1000-1100lm

Efficiency: 87 lm/W
Life time: 50,000 hours (70% Lumen maintenance)
3 Years Guarantee

