


EPO / EPO Maxi

Recessed Ground Light

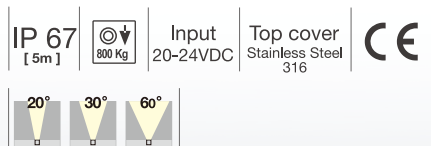

OSRAM

Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 20°, 30°, 60°

PHYSICAL

top cover: stainless steel 316
body: anodized aluminium


Function

High power ground light with great accent lighting effect.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
Stainless steel (316) front face ensures corrosion free outdoor performance in salty, damp environment.
8 mm Tempered glass lens support 1,000 kg "driver over" performance,

8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Light emission: one emission, two opposite emissions, four emissions.
Very low surface temperature lens can be touched without injury.
Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K

EPO Maxi 11W 1000lm-1100lm

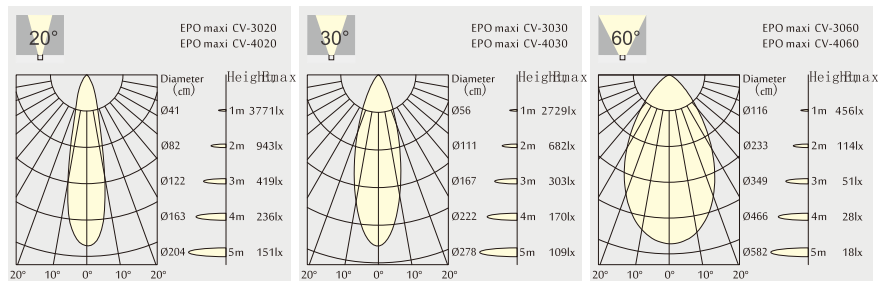

Order Information

EPO maxi 7 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EPO maxi CV-3020	1000 lm	24 V	11 W	11.5 W	83	3000K	20°
EPO maxi CV-4020	1100 lm	24 V	11 W	11.5 W	83	4000K	20°
EPO maxi CV-3030	1000 lm	24 V	11 W	11.5 W	83	3000K	30°
EPO maxi CV-4030	1100 lm	24 V	11 W	11.5 W	83	4000K	30°
EPO maxi CV-3060	1000 lm	24 V	11 W	11.5 W	83	3000K	60°
EPO maxi CV-4060	1100 lm	24 V	11 W	11.5 W	83	4000K	60°