
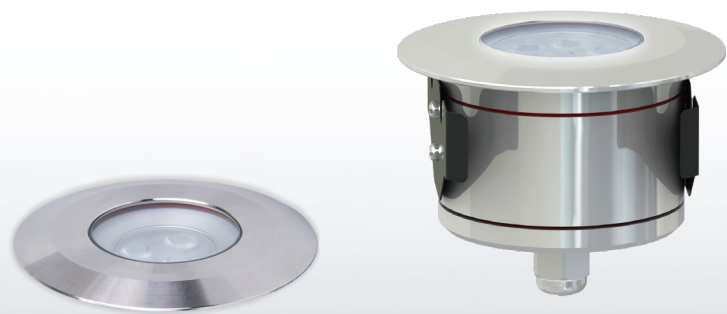


EPO / EPO Mini S316

Stainless Steel 316 Version

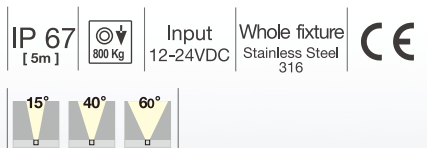

Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 15°, 40°, 60°

PHYSICAL

top cover: stainless steel 316
body: stainless steel 316

Function

Creating striking wall effect with focus beam.

IP 67 design with integral thermal management for long life.


High precision machining ensures perfect mechanical fit for long life.

The whole fixture is made of stainless steel(316), ensures corrosion free outdoor performance in salty, damp environment,

8 mm Tempered glass lens support 800 kg "driver over" performance, High reliability, maintenance free. Very low surface temperature lens can be touched without injury. Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K

EPO Mini S316 4.3 W 380lm-420lm

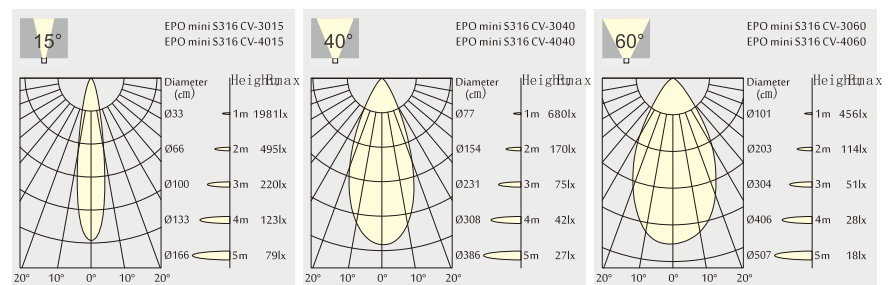

Order Information

EPO mini S316 3 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EPO mini S316 CV-3015	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	15°
EPO mini S316 CV-4015	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	15°
EPO mini S316 CV-3040	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	40°
EPO mini S316 CV-4040	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	40°
EPO mini S316 CV-3060	380 lm	12-24 V	4.3 W	4.8 W	83	3000K	60°
EPO mini S316 CV-4060	420 lm	12-24 V	4.3 W	4.8 W	83	4000K	60°

EPO Mini CV Ground Light Series
External 12-24VDC LED driver is required
Non-Dimmable
Lumen output: 380-420lm

Efficiency: 79 lm/W
Life time: 50,000 hours (70% Lumen maintenance)
3 Years Guarantee



Features



Cover: stainless steel 316
Body: stainless steel 316
Glass: tempered glass