

EPO / EPO Nano

Recessed Ground Light

IP 67 [5m]	800 Kg	Input 12-24VDC	Top cover Stainless Steel 316	CE



EPO NANO V2



Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME


L80 / 50,000h

OPTICAL

direct illumination
beam angle 15°, 25°, 40°

PHYSICAL

top cover: stainless steel 316
body: anodized aluminium

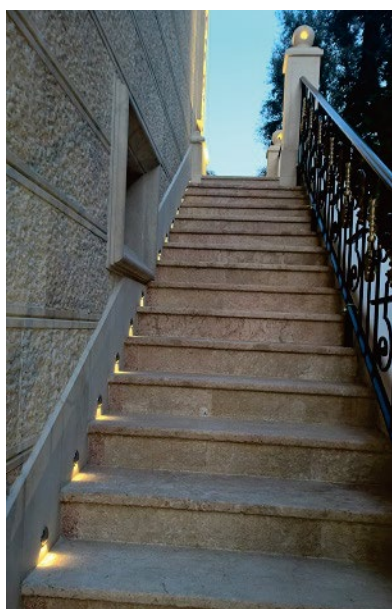

Function

A perfect marker light for in-ground or outdoor application.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Light emission: one emission, two

Light emission: one emission, two opposite emissions.
Very low surface temperature lens can be touched without injury
Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K



EPO NANO V2 1.6W 15-17lm

Order Information

EPO NANO V2 1 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT
EPO NANO V2-30	15 lm	12-24 V	1.6 W	2 W	83	3000K
EPO NANO V2-40	17 lm	12-24 V	1.6 W	2 W	83	4000K