


EPO / EPO Nano

Recessed Ground Light



EPO NANO

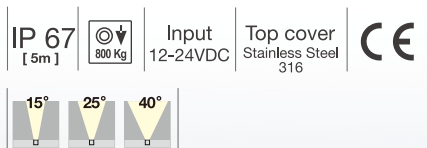

Quickinfo

GENERAL

underground
IP 67

LED

OSRAM LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME


L80 / 50,000h

OPTICAL

direct illumination
beam angle 15°, 25°, 40°

PHYSICAL

top cover: stainless steel 316
body: anodized aluminium

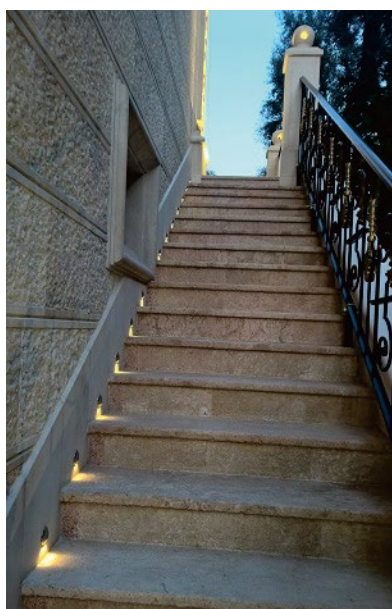

Function


A perfect marker light for in-ground or outdoor application.
IP 67 design with integral thermal management for long life.
High precision machining ensures perfect mechanical fit for long life.
8 mm Tempered glass lens support 800 kg "driver over" performance,
High reliability, maintenance free.
Light emission: one emission, two

Light emission: one emission, two opposite emissions.
Very low surface temperature lens can be touched without injury
Suitable for indoor applications in bathroom, kitchens, bars when lens may be touched without injury.

Light distribution for 3000K



EPO NANO 1.6W 120lm-140lm

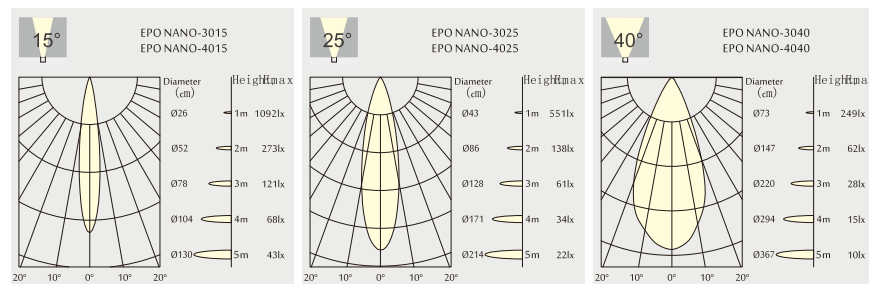

Order Information

EPO NANO 1 LED MODELS

(With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
EPO NANO-3015	120 lm	12-24 V	1.6 W	2 W	83	3000K	15°
EPO NANO-4015	140 lm	12-24 V	1.6 W	2 W	83	4000K	15°
EPO NANO-3025	120 lm	12-24 V	1.6 W	2 W	83	3000K	25°
EPO NANO-4025	140 lm	12-24 V	1.6 W	2 W	83	4000K	25°
EPO NANO-3040	120 lm	12-24 V	1.6 W	2 W	83	3000K	40°
EPO NANO-4040	140 lm	12-24 V	1.6 W	2 W	83	4000K	40°