



NEW

FAIRY A

Garden Light

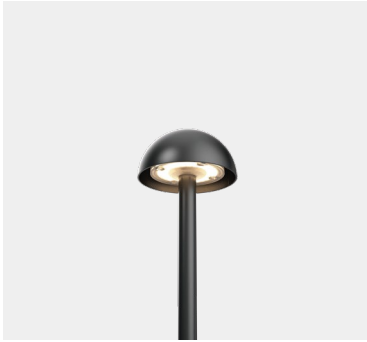

Black



Drawing

Order Options

FAIRY S100 CV

| Code | System LM | LED W | System W | Input Voltage | CRI | CCT | Beam |
|-----------------------|------------|-------|----------|---------------|-----|------------|------|
| FAIRY S100 A CV-82230 | 260 /390lm | 4W | 5W | 24V DC | 80 | 2200/3000K | 130° |

FAIRY S100 HV

| Code | System LM | LED W | System W | Input Voltage | CRI | CCT | Beam |
|-----------------------|------------|-------|----------|---------------|-----|------------|------|
| FAIRY S100 A HV-82230 | 300 /460lm | 6W | 7W | 220-240VAC | 80 | 2200/3000K | 130° |



Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- TWist&Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2200K or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- 24VDC or 220-240VAC input are optional
- Wider light distribution 120° achieved by advanced lens design
- Invisible screws for esthetic appeal
- 5 years warranty

Specifications

- Input Voltage: 24VDC/220-240VAC
- Beam angle: 130°
- Physical: Die-casting, Powder coating

Type



pathlight

Light distribution



Accessory



MT01

Pole spike

For soft soil



MT02

Spike with pedal

For hard soil



MT03

Base

For wood or concrete



EP300

Extension Pole 300mm

Length can be tailored