

Order Options

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
FAIRY S100 C CV-82230	260 /390lm	4W	5W	24V DC	80	2200/3000K	130°
FAIRY S100 HV							
Code	System LM	LED W	System W	Input Voltage	CRI	ССТ	Beam
FAIRY S100 C HV-82230	300 /460lm	6W	7W	220-240VAC	80	2200/3000K	130°




Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- TWist&Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2200K or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test,
- suitable for seaside installations
- 24VDC or 220-240VAC input are optional
- Wider light distribution 120° achieved by advanced lens design
- Invisible screws for esthetic appeal
- 5 years warranty

Specifications

- Input Voltage:24VDC/220-240VAC
- Beam angle:130°
- Physical: Die-casting, Powder coating

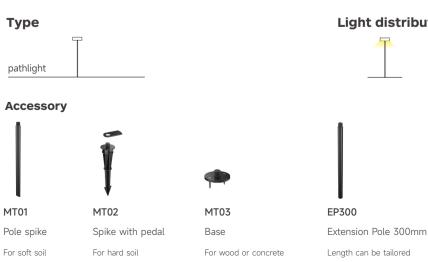

Light distribution