


FOCAL

Recessed Ground Light

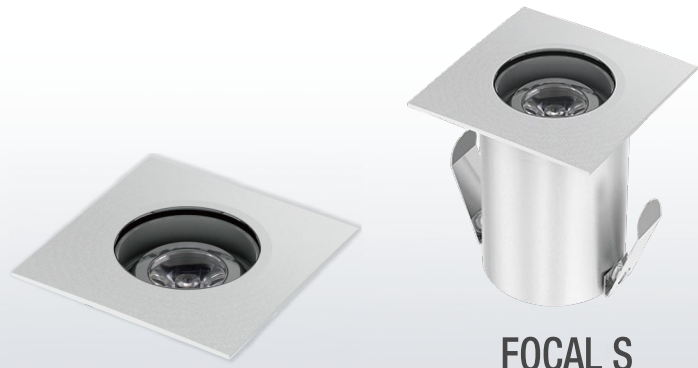

FOCAL S

Quickinfo

GENERAL

underground

IP 65

adjustable

LED

OSRAM LED module

2700K, 3000K, 4000K

CRI > 80, CRI > 90

Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination

beam angle 15°, 25°, 40°

PHYSICAL

top cover: stainless steel 316

body: anodized aluminium

Function

A perfect marker light for in-ground or outdoor application.

IP65 design with integral thermal management for long life.

Round cover design containing one LED unit that can adjust to 15°, bringing wall washing and greater flexibility.

High precision machining ensures perfect mechanical fit for long life.

8 mm Tempered glass lens support

1,000 kg "driver over" performance,

High reliability, maintenance free.

Very low surface temperature lens can be touched without injury


Suitable for indoor applications in

bathroom, kitchens, bars when lens may

be touched without injury.

Light distribution for 3000K

FOCAL R 1.6W

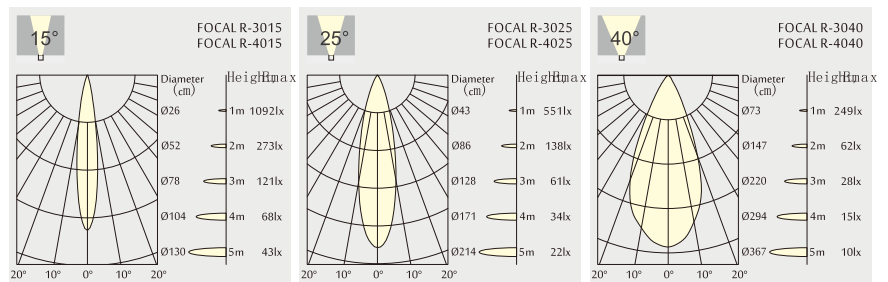

Order Information

FOCAL R 1 LED MODELS (With OSRAM LED, DC-DC driver)

Code	Lumen output	Input Voltage	LED Power	System Power	CRI	CCT	BEAM
FOCAL R-3015	120 lm	12-24 V	1.6 W	2 W	83	3000K	15°
FOCAL R-4015	140 lm	12-24 V	1.6 W	2 W	83	4000K	15°
FOCAL R-3025	120 lm	12-24 V	1.6 W	2 W	83	3000K	25°
FOCAL R-4025	140 lm	12-24 V	1.6 W	2 W	83	4000K	25°
FOCAL R-3040	120 lm	12-24 V	1.6 W	2 W	83	3000K	40°
FOCAL R-4040	140 lm	12-24 V	1.6 W	2 W	83	4000K	40°

