


LINK60 Series

LINEAR PROFILE

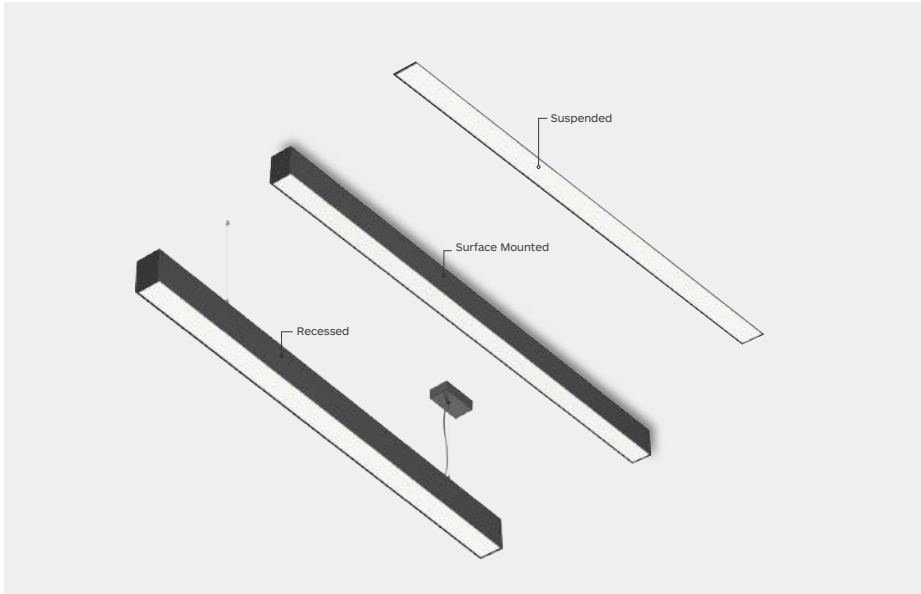


LINK60

Linear Profile



Drawing

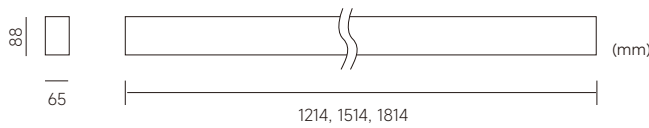

LINK60 Series



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation


Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Type



Installation type



Downward lighting

SAMSUNG

Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1200MM							
LINK60-DL-CL1200-25W-830	23W	25W	2500lm	>80	3000K	80°	1214*65*88mm
LINK60-DL-CL1200-25W-840	23W	25W	2600lm		4000K		