


# LINK60 Series

## LINEAR PROFILE

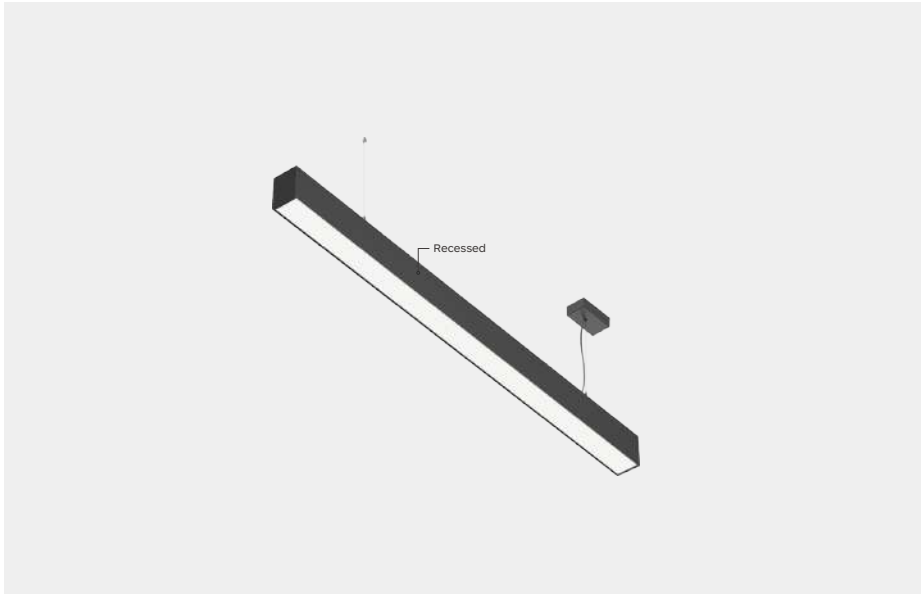


# LINK60

## Linear Profile



### Drawing

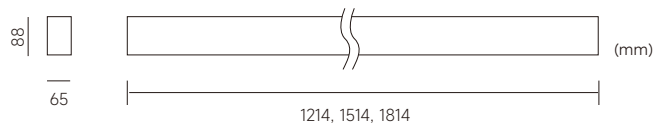

## LINK60 Series



### Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

### Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

### Type



### Installation type



### Downward and upward lighting



Code	LED W	System W	System LM	CRI	CCT	Beam	Size
<b>1200MM</b>							
LINK60-UL-CL1200-38W-830	11W ↑ 23W ↓	13W ↑ 25W ↓	4230lm	>80	3000K	80° ↓ 100° ↑	1214*65*88mm
LINK60-UL-CL1200-38W-840	11W ↑ 23W ↓	13W ↑ 25W ↓	4410lm		4000K	80° ↓ 100° ↑	