


LINK60 Series

LINEAR PROFILE

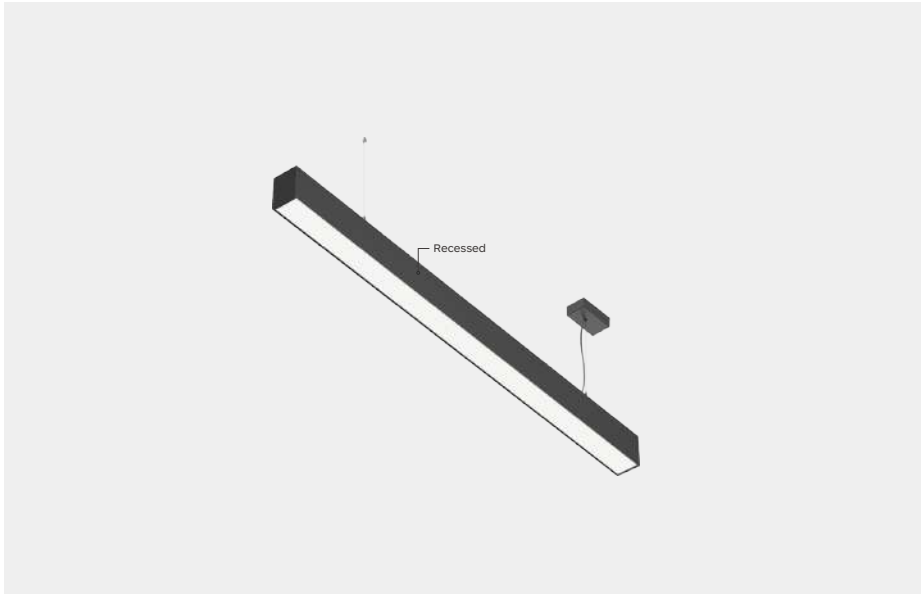


LINK60

Linear Profile



Drawing

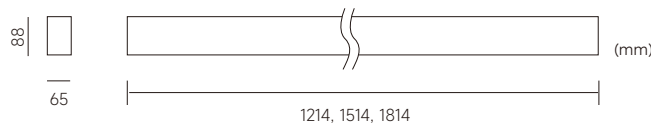

LINK60 Series



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Type



Installation type



Downward and upward lighting



| Code | LED W | System W | System LM | CRI | CCT | Beam | Size |
|--------------------------|-------------|-------------|-----------|-----|-------|--------------|--------------|
| 1500MM | | | | | | | |
| LINK60-UL-CL1500-47W-830 | 15W ↑ 30W ↓ | 16W ↑ 31W ↓ | 5230lm | >80 | 3000K | 80° ↓ 100° ↑ | 1514*65*88mm |
| LINK60-UL-CL1500-47W-840 | 15W ↑ 30W ↓ | 16W ↑ 31W ↓ | 5450lm | | 4000K | 80° ↓ 100° ↑ | |