


LINK60 Series

LINEAR PROFILE

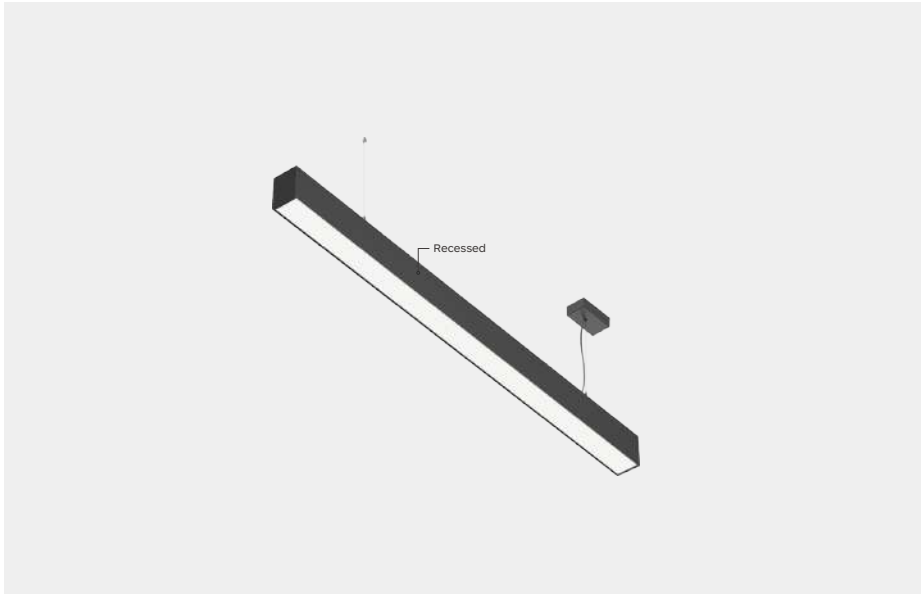


LINK60

Linear Profile



Drawing

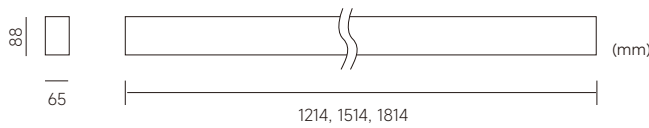

LINK60 Series



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Type



Installation type



Downward and upward lighting



Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1800MM							
LINK60-UL-CL1800-58W-830	18W ↑ 35W ↓	20W ↑ 38W ↓	6460lm	>80	3000K	80° ↓ 100° ↑	1814*65*88mm
LINK60-UL-CL1800-58W-840	18W ↑ 35W ↓	20W ↑ 38W ↓	6730lm		4000K	80° ↓ 100° ↑	